



CORE PRODUCT CATALOG



JB INDUSTRIES JUST BETTER





F6 DUAL PISTON REFRIGERANT RECOVERY UNIT



DMG2 2-VALVE DIGITAL MANIFOLD



LDC-4000 COMBUSTIBLE GAS & HC REFRIGERANT LEAK DETECTOR



JB'S WIRELESS SUITE OF PRODUCTS



JB BACKPACK & TOOL BAG



LED BACK-LIT GAUGES

INDUSTRY'S ONLY LED BACK-LIT GAUGES

DON'T BE LEFT IN THE DARK.

INTRODUCING JB INDUSTRIES BACK-LIT LED GAUGES THAT ARE DESIGNED TO HELP SERVICE TECHNICIANS SEE IN DARK SPACES.

ALL JB VACUUM PUMPS

100% MADE IN USA

100% FIELD REPAIRABLE

24 MONTH OTC
WARRANTY

ALL METAL
CONSTRUCTION

STAINLESS STEEL
VALVING

2-STAGE DIRECT DRIVE

1/2 HP CAPACITOR

THERMAL OVERLOAD
PROTECTION

CHECK VALVE
PREVENTS OIL
BACK FLOW

TETHERED SAFETY
CAP PREVENTS
OIL SPILLS

PLATINUM® BEST PUMP IN THE INDUSTRY

Available in domestic 115 volt,
international 230 volt, & dual voltage



Blank-off/isolation valve for testing leaks

O-ring sealed drain valve

Low profile rocker switch



1/4", 3/8" & 1/2"
INTAKE PORT



15 MICRON
RATING



GAS BALLAST INCREASES
PUMP DOWN SPEED &
KEEPS OIL CLEANER



PLATINUM® PUMPS

	DV-42N	DV-85N	DV-142N	DV-200N
CFM	1.5 CFM (42 l/m)	3 CFM (85 l/m)	5 CFM (142 l/m)	7 CFM (200 l/m)
MOTOR	1/2 HP 1725 RPM	1/2 HP 1725 RPM	1/2 HP 1725 RPM	1/2 HP 1725 RPM
VOLTAGE	115v, 60Hz	115v, 60Hz	115v, 60Hz	115v, 60Hz



BLACK GOLD BEST PUMP OIL IN THE INDUSTRY

PUMP OIL ACTS SIMULTANEOUSLY
AS A COOLANT, LUBRICANT & SEALANT

BLACK GOLD VACUUM PUMP OIL

PART NO.	DESCRIPTION	QTY.
DVO-1	Pint Bottle	24
DVO-12	Quart Bottle	12
DVO-24	Gallon Bottle	6



ELIMINATOR®

MADE IN USA

24 MONTH WARRANTY

Available in domestic 115 volt, international 230 volt, & dual voltage

Break-resistant 1/2" ergonomic handle

Large easy to see oil level sight glass

O-ring sealed to prevent leaks

2-Stage direct drive

 1/4" & 3/8" INTAKE PORT

 25 MICRON RATING

 WELL-PROTECTED OIL DRAIN VALVE



DV-T1

ELIMINATOR® PUMPS			
	DV-3E	DV-4E	DV-6E
CFM	3 CFM (85 l/m)	4 CFM (113 l/m)	6 CFM (170 l/m)
MOTOR	1/2 HP 1725 RPM	1/2 HP 1725 RPM	1/2 HP 1725 RPM
VOLTAGE	115v, 60Hz	115v, 60Hz	115v, 60Hz

THE TANK
DV-T1 VACUUM PUMP OIL CADDY

UL LISTED RUL YouTube

Change oil easily between jobs, no more mess & spills.

F6™ DUAL PISTON REFRIGERANT RECOVERY UNIT

INDUSTRY LEADING REFRIGERANT RECOVERY

The new **F6-DP** Recovery Unit features a full 1 horsepower motor and is backed by an unsurpassed 3 year OTC warranty. The F6's dual piston compressor and high efficiency micro-channel condenser design recovers refrigerant at industry leading speeds.

 DUAL PISTON COMPRESSOR

 MICRO-CHANNEL CONDENSER

 3 YR 3 YEAR OTC WARRANTY

 1 HP FULL ONE HORSEPOWER MOTOR

NEW

3 YEAR WARRANTY



F6-DP

CE SP UL VERIFIED



KOBRA®

FAST - FIERCE - FLEXIBLE



JB has made two revolutionary patent pending design improvements to our American made KOBRA® series of high pressure hoses. The first change is incorporated into our CCLE Environmental KOBRA® hose which features internal enhancements that significantly reduce blowouts and provide maximum flow. We have redesigned the gasket, barb, depressor, and the cup as a complete upgrade to the existing hose fitting.

The second change is incorporated into our CCLS Secure Seal KOBRA® hose which features a low loss fitting that is the industry's only UL recognized fitting approved for R-410A. The secure seal fitting traps refrigerant inside the hose to help meet non-venting requirements. The low loss fitting is also completely repairable.

CLS SERIES - KOBRA® SECURE SEAL HOSE

LENGTH	BLUE	YELLOW	RED	BYR	4 PACK
36" (91 cm)	CLS-36B	CLS-36Y	CLS-36R	CCLS-36	CCLS4-36
48" (122 cm)	CLS-48B	CLS-48Y	CLS-48R	CCLS-48	CCLS4-48
60" (152 cm)	CLS-60B	CLS-60Y	CLS-60R	CCLS-60	CCLS4-60
72" (182 cm)	CLS-72B	CLS-72Y	CLS-72R	CCLS-72	CCLS4-72
10' (3 m)	CLS-120B	CLS-120Y	CLS-120R	---	---
25' (7.6 m)	CLS-300B	CLS-300Y	CLS-300R	---	---
50' (15.2 m)	CLS-600B	CLS-600Y	CLS-600R	---	---
75' (22.8 m)	CLS-900B	CLS-900Y	CLS-900R	---	---
100' (30.5 m)	CLS-1200B	CLS-1200Y	CLS-1200R	---	---

CLE SERIES - KOBRA® GASKET-SEALED ENVIRO HOSE

LENGTH	BLUE	YELLOW	RED	BYR	4 PACK
36" (91 cm)	CLE-36B	CLE-36Y	CLE-36R	CCELE-36	CCLE4-36
48" (122 cm)	CLE-48B	CLE-48Y	CLE-48R	CCELE-48	CCLE4-48
60" (152 cm)	CLE-60B	CLE-60Y	CLE-60R	CCELE-60	CCLE4-60
72" (182 cm)	CLE-72B	CLE-72Y	CLE-72R	CCELE-72	CCLE4-72
10' (3 m)	CLE-120B	CLE-120Y	CLE-120R	---	---
25' (7.6 m)	CLE-300B	CLE-300Y	CLE-300R	---	---
50' (15.2 m)	CLE-600B	CLE-600Y	CLE-600R	---	---
75' (22.8 m)	CLE-900B	CLE-900Y	CLE-900R	---	---
100' (30.5 m)	CLE-1200B	CLE-1200Y	CLE-1200R	---	---



800 psi working & 4000 psi burst


Fully repairable

Nitrile cover is resistant to oil, extending the life of the hose

Kevlar lined for strength & flexibility

Maximum flow, no blowouts

CLS5 SERIES KOBRA® HOSES
WINNER OF THE DEALER
DESIGN AWARD.

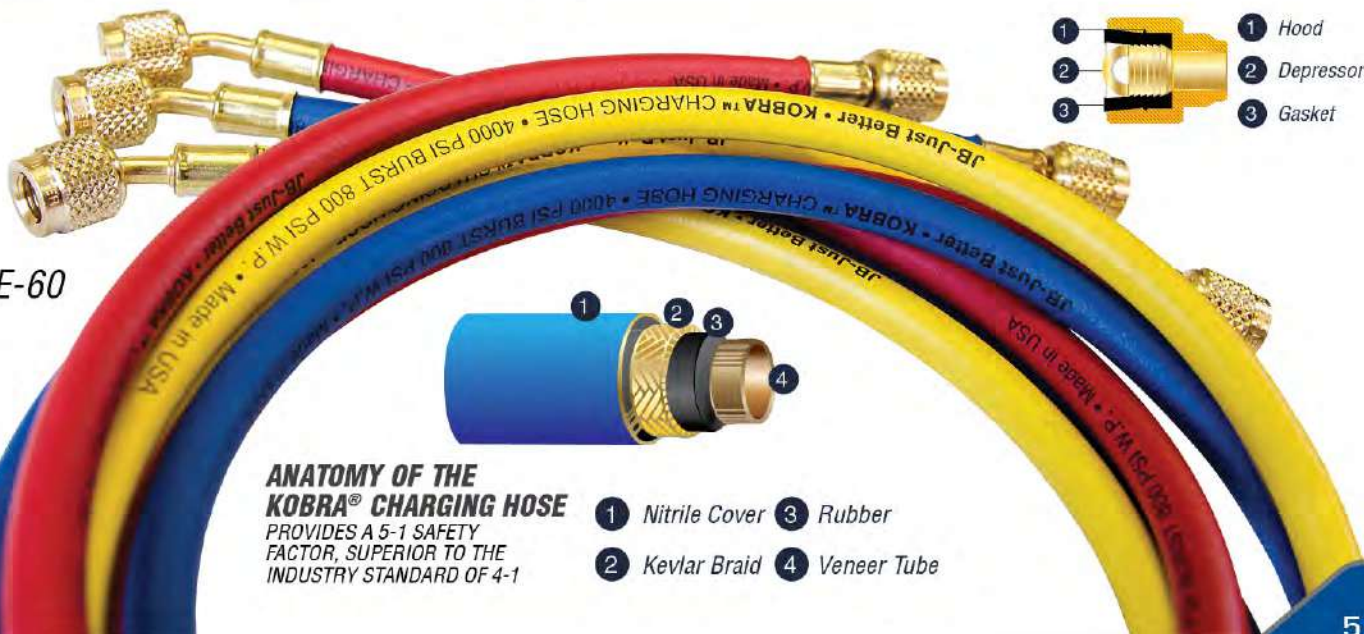

- 1 Hood
- 2 Depressor
- 3 Gasket



ANATOMY OF THE KOBRA® CHARGING HOSE
PROVIDES A 5-1 SAFETY FACTOR, SUPERIOR TO THE INDUSTRY STANDARD OF 4-1

- 1 Nitrile Cover
- 2 Kevlar Braid
- 3 Rubber
- 4 Veneer Tube

DMG2 SERIES

2-VALVE DIGITAL MANIFOLD

Robust transducer design

BAR, PSI, KPA & MPA

Sturdy body designed for durability

Simple and accessible data display

Made in Spain



80+ REFRIGERANTS
PREPROGRAMMED



SIMULTANEOUS
CALCULATION OF
SUPERHEAT/SUBCOOL



HEAVY DUTY K-TYPE
THERMAL COUPLES
INCLUDED

NEW

12 MONTH
WARRANTY



DMG2-5



STANDARD BRASS 2-VALVE MANIFOLD

All Metal Gauges

Pull-out proof hanging hook

Easy turning hand wheels
(Metal available on select models)



SURGE DAMPENED
GAUGES FOR REDUCED
NEEDLE MOVEMENT



AVAILABLE WITH 2-1/2"
& 3-1/8" GAUGES



ORIGINAL FREE FLOATING
DUAL O-RING SEALING
SYSTEM FOR FASTER
EVACUATION/CHARGING



M2-23125

PATRIOT™

2-VALVE BRASS MANIFOLD

Rugged bar design with metal handles

Supports OPERATION HOMEFRONT

THE MANIFOLD THAT GIVES BACK

For each Patriot™ sold, JB will donate \$1 to **Operation Homefront** to support their vision of being the provider of choice for emergency financial and other assistance to the families of our service members and wounded warriors. Together, we hope to give back to those who have given so much.



SURGE DAMPENED
GAUGES FOR REDUCED
NEEDLE MOVEMENT



360° SWIVELING
HOSE-HOLDERS



ORIGINAL FREE FLOATING
DUAL O-RING SYSTEM



To learn more about
Operation Homefront, visit:
www.operationhomefront.net



22225L

ZEPPELIN®

4-VALVE ALUMINUM MANIFOLD

Available with 2-1/2", 3-1/8" & 4" size gauges

Precisely machined anodized aluminum body

Easy turning, soft-grip rubber hand wheels



SURGE DAMPENED GAUGES FOR REDUCED NEEDLE MOVEMENT



FULL 3/8" BORE EVACUATES 40% FASTER THAN COMPETING 4-VALVE MANIFOLDS



ORIGINAL FREE FLOATING DUAL O-RING SYSTEM



MADE IN USA

25225

ALSO AVAILABLE IN 2-VALVE 24000 SERIES

REVOLVER®

4-VALVE BALL VALVE MANIFOLD

THE INDUSTRIES ONLY
LIQUID CHARGING
BALL VALVE MANIFOLD

3/8" Port for faster evacuation

Capable of liquid refrigerant charging

Soft grip rubber handwheels reduce turning to open/close



FOUR INTERNAL BALL VALVES



360° SWIVELING HOSE-HOLDERS



QUARTER TURN FULL OPEN/CLOSE HANDLE



MADE IN USA

26225

REVOLVER® LIQUID CHARGING

THE METERING BALL VALVE ADJUSTS TO FINITE OPENINGS FOR LIQUID CHARGING



2 1/2" (63.5 MM) METAL

			COMPOUND	PRESSURE
R-22	R-404A	R-410A	M2-460	M2-465
R-22	R-134a	R-404A	M2-430	M2-435
R-410A			M2-410	M2-415
R-12	R-22	R-502	M2-250	M2-500
R-134a	R-404A	R-507A	M2-420	M2-425



M2-460



M2-465

3 1/8" (80 MM) METAL

ILLUMINATING			COMPOUND	PRESSURE
R-22	R-404A	R-410A	M2-820	M2-825
R-22	R-134a	R-404A	M2-851	M2-856
R-22	R-134a	R-410A	M2-826	M2-827
R-410A Non-illuminating			M2-810	M2-815
R-12	R-22	R-502	M2-800	M2-805
R-22	R-410A	R-407C	M2-830	M2-831



M2-820



M2-825

ILLUMINATING 1% CALIBRATED

			COMPOUND	PRESSURE
R-22	R-404A	R-410A	M2-924	M2-925
R-22 R-404A R-410A Camo patterned gauges			M2-924CM	M2-925CM



M2-860



M2-865

LIQUID FILLED 1% CALIBRATED

			COMPOUND	PRESSURE
R-22	R-404A	R-410A	M2-890	M2-895
R-22	R-134a	R-404A	M2-880	M2-885

3 1/8" LED BACK-LIT GAUGES

Back-lit by LED lights to illuminate gauge face for legibility in dark environments. Replaceable 3v Lithium coin cell battery with 250+ hour battery life included.

ALSO AVAILABLE ON MANIFOLDS.

			COMPOUND	PRESSURE
R-22	R-404A	R-410A	M2-820L	M2-825L



M2-820L

NEW



M2-825L

INDIVIDUAL QUICK CONNECT TEST GAUGES

Designed for quick pressure checks on large systems or refrigerant tanks. Perfect for permanent attachment to large systems. Available with any replacement gauge offered by JB or in different size connections upon request.

AVAILABLE IN OTHER REFRIGERANT COMBINATIONS				
2 1/2"		COMPOUND	PRESSURE	
R-22	R-404A	R-410A	QC-G460	QC-G465
R-22	R-134a	R-404A	QC-G430	QC-G434
3 1/8"		COMPOUND	PRESSURE	
R-22	R-404A	R-410A	QC-G820	QC-G825
R-22	R-134a	R-404A	QC-G851	QC-G856



QC-G430

NEW



QC-G434

2-1/2" & 3-1/8" Gauges with all brass quick connect fitting.

AURORA®

LD-6000IR INFRARED REFRIGERANT LEAK DETECTOR

12 MONTH WARRANTY

INFRARED LEAK DETECTOR

Infrared sensor life tested to last up to 10 years

Peak function stores the highest change in refrigerant concentration achieved while continuing to detect leaks



INFRARED SENSOR ACCURATE TO 0.10 OZ./YEAR



SENSITIVITY CAN BE PROGRAMMED TO HIGH, MEDIUM AND LOW



MAGNETIC HANGER



AUDIBLE & VISUAL ALARMS



LD-6000IR

PROWLER®

ELECTROCHEMICAL LEAK DETECTOR

Electrochemical function of sensor does not diminish over time or with use

Backlit LCD screen with sensitivity bar graph tilts up for easy viewing at any angle



SENSOR LIFE TESTED TO BE GREATER THAN 10 YEARS, UNIQUE IN INDUSTRY



SILENT VIBRATING HANDLE ALARM



SAFE TO USE IN COMBUSTIBLE ATMOSPHERES



AUDIBLE, VISUAL & VIBRATING HANDLE ALARMS



LD-5000

ASSEMBLED IN USA

24 MONTH WARRANTY

LDC-4000 COMBUSTIBLE GAS & HC REFRIGERANT LEAK DETECTOR

Long life, stable sensor

Automatic calibration and reset to ambient

Comfortable Sanoprene grip

< 5 PPM Methane Sensitivity



INTRINSICALLY SAFE CERTIFIED



LOW BATTERY INDICATOR



SOLID STATE HEATED SENSOR



AUDIBLE ALARMS



LDC-4000

MADE IN USA

NEW

24 MONTH WARRANTY

DV-40S

WIRELESS MICRON GAUGE

Factory calibrated vacuum range of 12,000 microns down to 10 microns

Light or dark app theme for visibility in different lighting environments

Backup display on unit

Rechargeable battery & USB charging adapter



PROGRAMMABLE ALARMS FOR LOW/HIGH LIMITS & APPROACHING/LEAKING



MEASURES IN MICRONS, PSIA, IN-HG, PASCALS, TORR, MTORR, & MBAR



DATA LOGGING & JOB TIMING SYSTEM FOR RECORDING & SHARING JOB STATISTICS




12 MONTH WARRANTY

DV-40S



FREE
JB DV-40S APP



SUPERNOVA®

DIGITAL MICRON GAUGE

Factory calibrated & requires no additional calibration

Easy to read LCD Screen

Powered by 3 AA batteries (included) or AC power adapter



PROGRAMMABLE ALARM SETTINGS



MEASURES IN MICRONS, PSIA, IN-HG, PASCALS, TORR, MTORR, & MBAR



FACTORY CALIBRATED VACUUM RANGE OF 12,000 - 10 MICRONS



12 MONTH WARRANTY

DV-41N



DV-22N

DIGITAL MICRON GAUGE

+32°F to 120°F (+0°C to 48.9°C) ambient temperature

Powers off after 10 min. to preserve battery life



SAVES LAST VACUUM READOUT AFTER SHUT-DOWN



MEASURES IN MICRONS, PSIA, IN-HG, PASCALS, TORR, MTORR, & MBAR



FACTORY CALIBRATED VACUUM RANGE OF 9,000 - 20 MICRONS



12 MONTH WARRANTY

DV-22N

ATLAS®

24 MONTH WARRANTY

WIRELESS REFRIGERANT CHARGING SCALE

Light or dark app theme for visibility in different environments

Water-resistant design

250 lbs Weight capacity (115 Kg)



EMAIL ACCESSIBLE JOB TIME RECORDING & DATA LOGGING



USER DEFINED WEIGHT & APPROACHING ALARMS




LED CONNECTIVITY & POWER LIGHTS



DS-20000S

FREE
JB DS-20000S APP



ATLAS®

24 MONTH WARRANTY

REFRIGERANT CHARGING SCALE

Solid state load cell accurate to 0.25 oz/10 gm without need of cylinder directly on center of weighing platform

Auto shut off after 30 minutes to preserve battery (can be disabled)

220 lbs Weight capacity (100 Kg)



DISPLAYS WEIGHT IN DECIMAL-POUNDS, POUNDS & OUNCES, & KILOGRAMS



LCD SCREEN ON HAND-HELD CAN BE READ FROM A DISTANCE OR IN DIRECT SUNLIGHT



PIECES ARE MODULARIZED SO PARTS ARE EASILY REPLACED WITHOUT NEED TO PURCHASE ENTIRELY NEW UNIT



DS-20000



MINI SPLIT TOOL KIT

EVERYTHING YOU NEED FOR SERVICING R-410A MINI SPLITS

JB offers three versatile kits featuring everything you need to install and service mini split units. MSKIT1 & MSKIT2 contain all essential tools to get the job done including the Dealer Design award winning Patriot™ 2-Valve Manifold, a Kobra® Secure Seal hose set that is UL approved for R-410A & a heavy-duty 6-spanner head torque wrench.

The MSKIT3 is an affordable solution for service technicians who already have a few basic tools in their tool box.



MSKIT1
MSKIT2



* For each Patriot™ Manifold, MSKIT1, or MSKIT2 sold, JB will donate to **Operation Homefront**.

To learn more about **Operation Homefront**, visit:
www.operationhomefront.net

INCLUDED IN MSKIT1

1/4"

PART NO.	DESCRIPTION
MSKIT1-BAG	JB's tool bag
22500	Patriot™ manifold with 410A gauges
CCLS-60	1/4" KOBRA® UL approved Secure Seal hose set
T30605	Metric (2-8mm) & Imperial (5/64 - 1/4") hex key set
T30600	Ratcheting eccentric cone flare tool
TRQ1080	Torque wrench set with 6 spanner heads
A32525N	1/4" Female x 1/4" SAE Valve core remover w/side port
SHLD-P4	SHIELD® locking cap R-410A (4 pack)
A31656	5/16" Female x 1/4" SAE brass adapters (2 included)
NFT5-4	1/4" Brass caps (5 included)

INCLUDED IN MSKIT2

5/16"

PART NO.	DESCRIPTION
MSKIT1-BAG	JB's tool bag
22505	Patriot™ manifold with 410A gauges
CCLS5-60	5/16" KOBRA® UL approved Secure Seal hose set
T30605	Metric (2-8mm) & Imperial (5/64 - 1/4") hex key set
T30600	Ratcheting eccentric cone flare tool
TRQ1080	Torque wrench set with 6 spanner heads
A32535N	5/16" Female x 5/16" SAE Valve core remover w/side port
SHLD-E4	SHIELD® locking cap R-410A (4 pack)
A31665	1/4" Female x 5/16" SAE brass adapters (2 included)
NFT5-5	5/16" Brass caps (5 included)

ACCESSORIES:



JB-TOOLBAG 1

Heavy duty canvas JB tool bag



JB-BACKPACK 1

Heavy duty JB canvas backpack

INCLUDED IN MSKIT3

1/4" & 5/16"

PART NO.	DESCRIPTION
MSKIT1-BAG	JB's tool bag
T30605	Metric (2-8mm) & Imperial (5/64 - 1/4") hex key set
T30600	Ratcheting eccentric cone flare tool
TRQ1075	Torque wrench set with 6 spanner heads
NFT5-4	1/4" Brass caps (5 included)
NFT5-5	5/16" Brass caps (5 included)
A31656	5/16" Female x 1/4" SAE brass adapters (2 included)



REFRIGERANT LOCKING CAPS

- PROTECTION FROM INHALANT ABUSE
- WATERPROOF COLOR-CODED CAPS
- SECURE, TAMPER-RESISTANT KEY
- DURABLE ALL BRASS DESIGN
- STOPS LEAKAGE
- ALL AMERICAN MADE

SHLD-MULTI UNIVERSAL REFRIGERANT LOCKING CAP KEY

JB's Universal Locking Cap Key allows you to unlock SHIELD®, C&D Valve and NOVENT® Refrigerant Locking Caps with interchangeable bits that are conveniently stored inside the tool.



INTERNATIONAL MECHANICAL CODE

1101.10

Refrigerant circuit access ports located outdoors shall be fitted with locking-type tamper resistant caps.

INTERNATIONAL RESIDENTIAL CODE

M1411.6

Refrigerant circuit access ports located outdoors shall be fitted with locking-type tamper resistant caps.



SHIELD® LOCKING CAPS WATER RESISTANT SLEEVES INCLUDED

PART NO.	FITTING SIZE	SLEEVE COLOR-CODE	DESCRIPTION
SHLD-U4	1/4"	Universal	(4 pack) Locking caps & 1 bit
SHLD-G4	1/4"	R-22	(4 pack) Locking caps & 1 bit
SHLD-P4	1/4"	R-410A	(4 pack) Locking caps & 1 bit
SHLD-E4	5/16"	Universal	(4 pack) Locking caps & 1 bit
SHLD-3-DRIVER	SHIELD® 3" stubby driver, includes 1 bit		
SHLD-8-DRIVER	SHIELD® 8" long driver, includes 2 bits		
SHLD-COMBO-DRIVER	SHIELD® includes 3" and 8" drivers with 2 bits		
SHLD-MULTI	Universal locking cap key for SHIELD®, Novent, and C&D locking caps		

SHIELD® locking caps available in packs of 12, 50 and 100.

ROTHENBERGER

pipetool technologies at work

ROTRAC PLUS

Features smooth-running telescopic action for a consistent working radius, a protected screw spindle to shield against dirt and jamming, and a lightweight cast aluminum body.



RT70020
1/8" to 1-1/8" OD

RT70021
1/4" to 1-5/8" OD



MINI-TUBE CUTTERS

Fatigue-free pressure control with a lightweight cast aluminum body



RT70401



RT70015

MINIBEND® TUBE BENDER

For exact, two-handed bending up to 180° for tubes made out of soft copper, brass, aluminum, and precision steel. 1/4", 5/16", and 3/8" OD.



RT25151



RT70105

EVACUATION & CORE REMOVER TOOLS

Specifically designed to valve off the system to remove valve core, these tools feature a quarter turn ball valve shut-off and o-ring seals.

The valve core can be completely removed and replaced without losing system charge. Speed-up evacuation, recovery, or recharging time through the full flow port. Both tools have a storage area to house spare valve cores.



VACUUM RATED

A32525N
1/4" Valve Core Remover
Tool With Side port

AVAILABLE IN 5/16" & 1/4" WITH AND WITHOUT SIDE PORT

VALVE CORE TORQUE TOOLS

Our valve core torque tool automatically sets proper torque to 5" pounds. Calibrated to precise torquing requirements for core valves, the tool will no longer tighten once proper torque is achieved. Eliminates guess work which results in under and over torquing. Works with all Schrader valve cores.



A32008
1/4" Valve core torque tool

1/4" VALVE CORES & TOOL

PTFE/neoprene seal replacement valve core.
Max 800 psi and 220°F (104°C).

A32004
Valve core tool



A31999
1/4" Valve core

CAPILLARY TUBING

Short coils are boxed with application charts. Cut from 100' (30.5 m) sealed and dehydrated tube. S/B 100' (30.5 m) coils are boxed with conversion and application charts.



TC-26-16
Short coil
capillary tubing



APOLLO ACTUATORS

PRESSURE TO 500 PSI, UL LISTED 57R7

UP TO +500°F WORKING TEMPERATURE AT 0 PSI

UP TO +300°F WORKING TEMPERATURE AT 500 PSI

NO BOLTED/SCREWED BONNETS OR FLANGES TO LEAK

APOLLO REGISTERED TO ISO 9001



V34202
5/8" OD Apollo Actuator

BRASS FITTINGS



T6-4
1/4" Flare x Flare x Female Flare



E1-2a
1/8" x 1/8" Flare x Male Pipe ELL



NS4-5
5/16" Short-Forged
Refrigeration Nut



B2-4
1/4" Copper Flare Gasket

ACCESS VALVES



A31004
1/4" OD x 3/16" ID
Copper Tube Extension



A32804
1/4" Copper Braze Tapper



A32904
1/4" Copper Braze Saddle
with Tapper



A31852
Swivel Tee with Depressor,
1/4" Fe SAE Nut on Branch



A31012
1/8" OD ext; 1/8" and 3/16"
Multi-Step Copper Tube Extension



A31722
1/8" ODS x 1/4" ODF
Brass Body



A31853
3/8" SAE x 3/8" Fe SAE
Swivel Nut x 1/4" Access Tee



A31492
1/8" MPT Elbow Connection



A31134
1/4" ODS x 5/16" ODF
Copper Braze Tee



A31334
1/4" OD Swaged
Copper Braze Tee



A31199
1/4" OD x 5/16" Min
Copper Access Union



A31134
5/8" ODS
90° Copper Elbow

QUICK COUPLER SHUT-OFF FITTINGS



33112N
1/4" QC x 1/4" SAE
33115N
5/16" QC x 1/4" SAE



33113N
90° Angle 1/4" QC x 1/4" SAE
33116N
90° Angle 5/16" QC x 1/4" SAE



33112RK
Rebuild kit for 1/4" QC Shut-Off
Fittings and 1/4" CLS Hose



T21295
Snap ring pliers for rebuilding
KOBRA® Secure Seal fittings
& Quick Coupler Shut-Off fittings
Includes 33112RK

ACCESS VALVE SERVICE KIT

Containing the most popular access fittings used on service calls in one convenient storage case.



AVK-001

QUICK SEAL CAPS

Finger-tight o-ring sealing for all male SAE connections.

NFT5-4
1/4" SAE Caps

NFT5-5
5/16" SAE Caps

NFT5-6
3/8" SAE Caps

NFT5-8
1/2" SAE Caps



JB INDUSTRIES IS THE PREMIER MANUFACTURER OF AMERICAN MADE HVAC/R PRODUCTS.

For over 49 years, JB has been committed to manufacturing products of the highest quality while providing exceptional customer service. JB products have been proudly made in America since its inception in 1967.

To learn more about JB Industries' full-line of dependable products and company history, visit jbind.com.

601 N. FARNSWORTH AVE.
AURORA, IL 60505

P: 800.323.0811
F: 800.552.5593

SALES@JBIND.COM

   
WWW.JBIND.COM



TM